
Egyptou Square

Zeit-Studie	**Budget (€)**	**Arbeitgeber**
2003-2004	4,000,000.00	A.Athanasiadis
	Besitzer	**Position**
	Polis Park	Athens

Underground parking below Egyptou Square with 361 vehicles capacity, in operation since 2005. It consists of 4.5 basements (9 semi-floors) with total covered area of 11470 m2.
Due to the great buoyancy load (underground water level -3.50), anchorage of the structure was required at the ground floor slab level to the perimeter earth retaining piles. The foundation is a general slab.

Parking Entrance

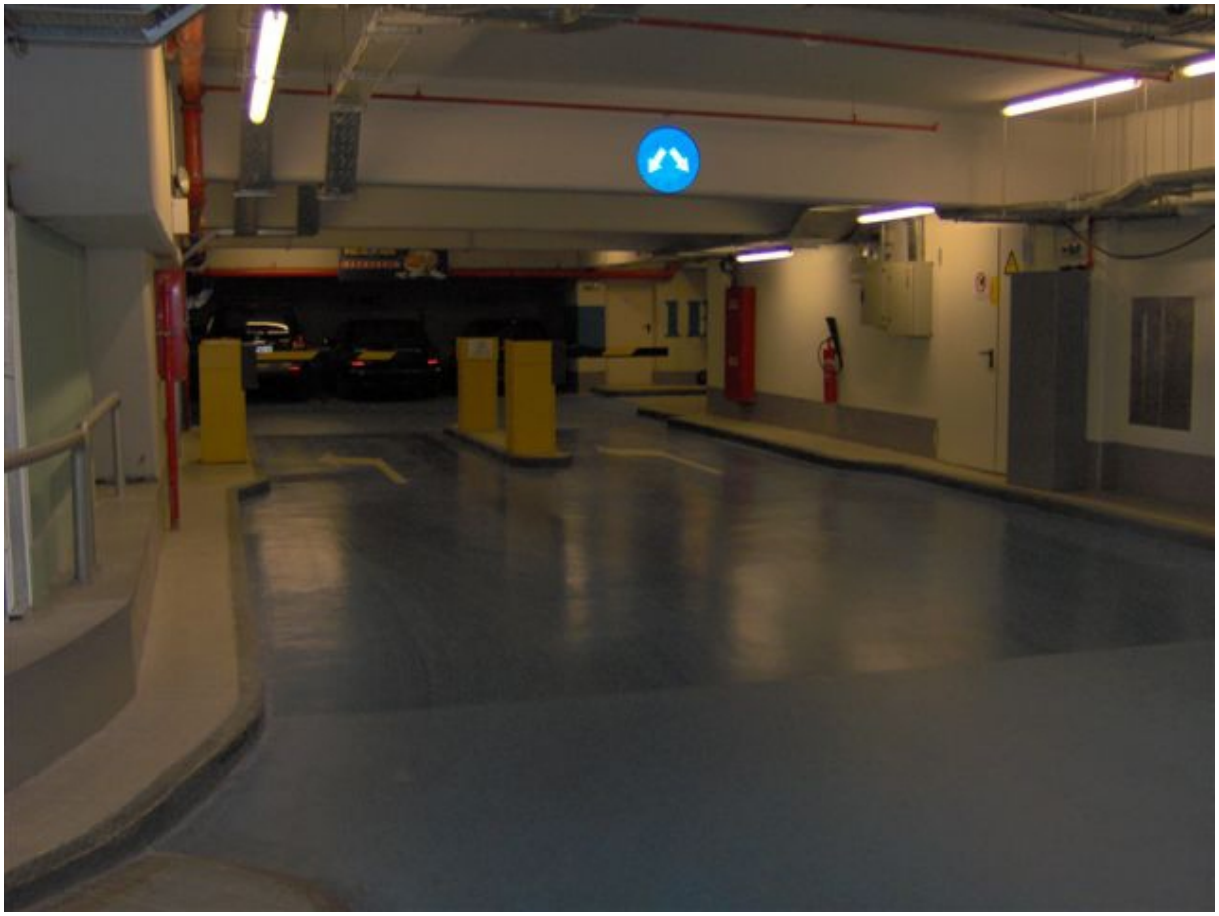

First Basement



Typical Semifloor



Typical Semifloor



Foundation construction phase



Intermediate floor construction phase

